CIELO

B-124

BATHROOM FAUCET

BEFORE YOU BEGIN YOUR INSTALLATION

- Shut off water supply
- Flush hot and cold water supply lines
- Required tools
- Installation by License Professional Plumber
- Flush the water pipe before installation
- Drawings are for reference only
- Do not disassemble the body

FAUCET INSTALLATION

1

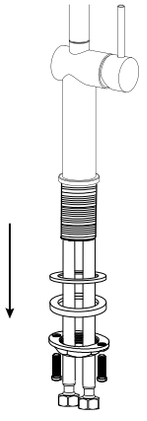

Remove the washer and mounting nut.

2

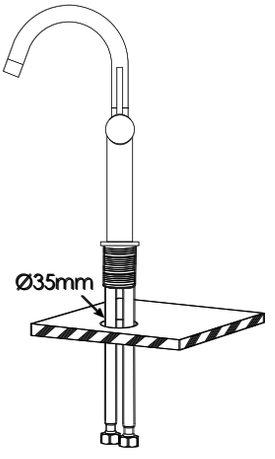

Ensure there is a Ø35mm through-hole on the counter. Position and insert faucet into faucet countertop hole.

3

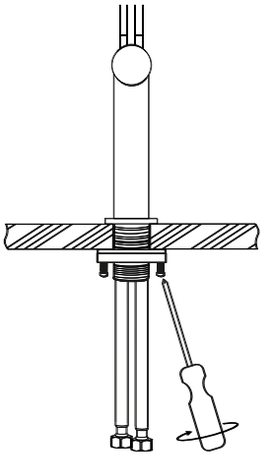

Tighten the mounting nut with the screws until faucet is firmly secure.

4

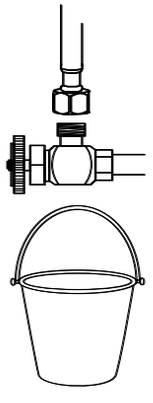

Before connecting supply hose, flush supply valves to clear any debris. Place a bucket underneath valves and run water for 5 to 10 seconds. Turn water off.

5

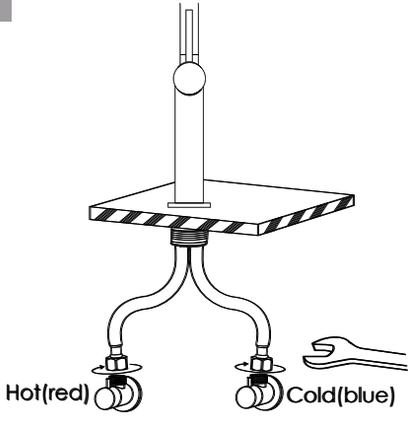

Connect hot and cold water lines to the inlet pipe and tighten with a wrench until snug. Do not over tight.

6

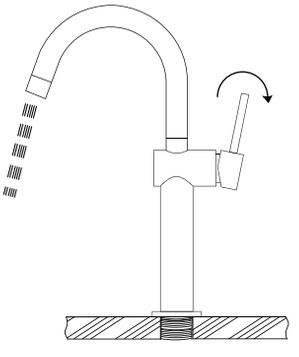

Open the water valves and check for leaks underneath. Then, run the faucet to test its function and confirm there are no leaks.

CARE AND CLEANING

Clean the faucet frequently using mild soap or an on-abrasive cleaner and then quickly rinse with water and dry with soft cloth only.

Using abrasive cleaners, solvents, acid cleaners or any scrubbing detergent, polisher or scraper will damage the finish and void the warranty.

WARRANTY

For additional technical assistance or for any questions or concerns about your bathroom faucet's warranty, please contact us.

www.stylishkb.com/warranty

www.stylishkb.com

care@stylishkb.com

+1-855-789-5352

Stylish International Inc.

Follow us on Instagram! Check out and let us know your comments stylish.international.inc

Products and specifications shown are subject to change without notice. Please contact our technical support at care@stylishkb.com for any further queries, replacement parts requests, etc. ©2021 Stylish® all right reserved.